

6-FMX series products is a high-capacity battery of new model. With easy usage and maintenance, it is intended for service in telecom system, UPS, and security system, etal. The designed float charge life could arrive 12 years above.

Normal Voltage	12V
Capacity	92 Ah @ 10hr to 1.80V per cell @ 25°C(77°F)
Weight	Approx. 33.5 kg (73.7 lbs)
Internal Resistance (full charged)	Approx. 5.00mΩ @ 25°C(77°F)
Maximum Discharge Current	726A (5sec)
Self Discharge @ 25°C (77°F)	Less than 8 % after 90 days storage
Operating Temperature Range	Discharge: -40°C ~ 50°C (-40°F ~ 122°F) Charge: -20°C ~ 45°C (-4°F ~ 113°F) Storage: -20°C ~ 40°C (4°F ~ 104°F)
Recommended Operating Temperature	15°C ~ 25°C (59°F ~ 77°F)
Maximum Charging Current Limited	18.4A
Charging Voltage @ 25°C(77°F)	Float: 2.23 V/cell, Temps coefficient -3mV/ cell • °C Cycle: 2.35 V/cell
Container Materials	ABS Flammability rating of materials(UL94-V0)
Terminal	M6 and TU ₂
Capacity Affected by Temperature	105 % @ 40°C 85 % @ 0°C 60 % @ -20°C

Attain certificate:

- ISO9001(03006Q10084R1M)
- ISO14001(03004E10097R0M)
- ISO18001(03006S10002R0M)
- UL (MH28466)
- CE(ED/2007/30041C)
- Russia telecom

conforms to Standard:

- GB/T 19638.2-2005
- YD/T799-2002
- JISC8704-2:1999
- IEC60896-2,2004

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


F.V/Time	30min	1hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	12hr
1.70V	97.3	54.2	35.4	25.7	20.7	16.5	14.1	11.3	9.4	7.9
1.75V	92.0	52.4	35.1	26.0	20.2	16.3	14.0	11.2	9.3	7.8
1.80V	87.0	51.4	34.6	25.5	20.1	16.1	13.9	11.1	9.2	7.7
1.83V	83.2	49.4	34.2	25.2	19.8	15.9	13.8	11.0	9.1	7.6
1.85V	80.3	47.7	33.9	24.9	19.7	15.8	13.7	10.9	9.0	7.5

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)


F.V/Time	30min	1hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	12hr
1.70V	176.5	100.7	67.9	52.3	40.9	32.8	28.3	22.6	18.8	15.7
1.75V	169.1	98.9	67.5	51.5	40.2	32.4	28.1	22.4	18.6	15.5
1.80V	161.7	97.8	67.2	50.7	39.8	32.1	27.8	22.3	18.5	15.5
1.83V	156.5	94.5	66.7	50.2	39.5	31.8	27.6	22.2	18.3	15.3
1.85V	153.0	92.3	66.3	50.0	39.1	31.6	27.4	22.1	18.2	15.2

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact SHUANGDENG for the latest information.


Discharge Performance at Different Discharge Rate

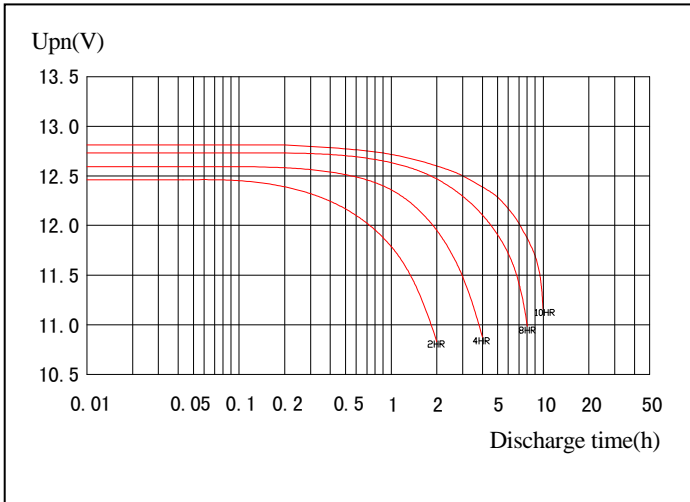


Curve of Self-discharge at Different Temperature

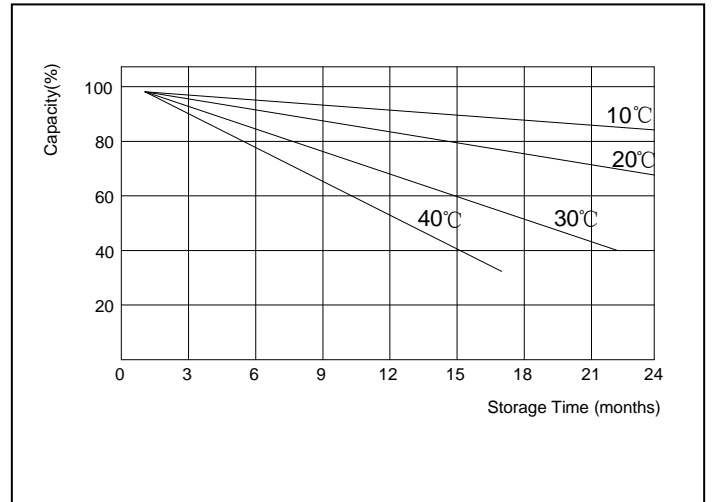

Capacity at Different Temperature

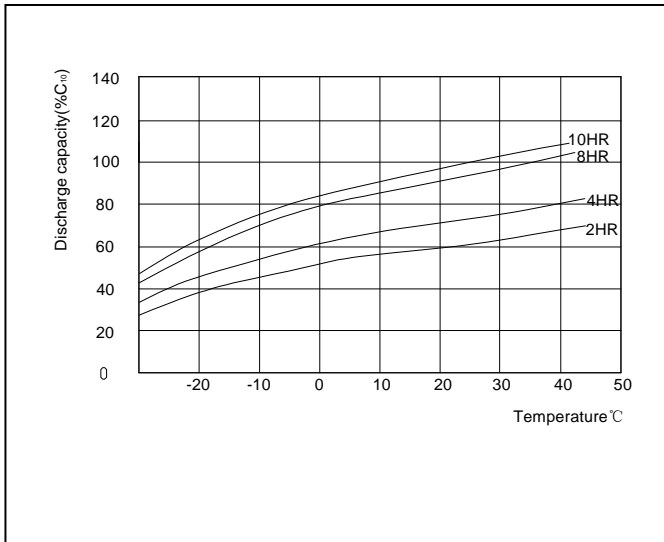

Constant Voltage Charge Characteristics

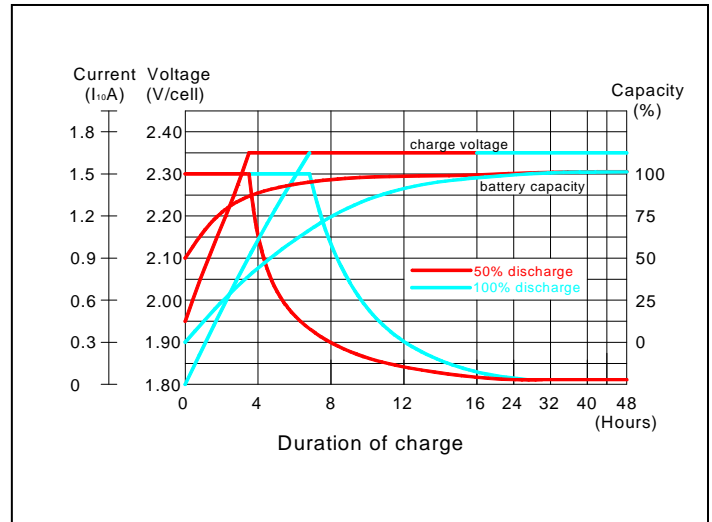

Free service tel:+86-4008-899-886

FAX: +86-25-83176850

Tel: +86-25-83176860

E-mail: gjpt@chinashoto.com

E-mail: joyce.zhong@chinashoto.com

Web: <http://www.chinashoto.cn/>