



# GFX-350

## 5 OPzS 350

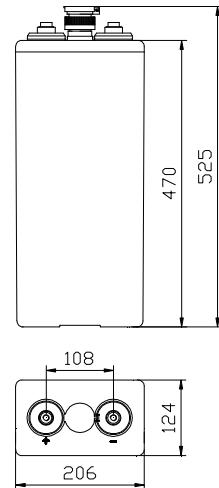

**Application:**

- Solar and wind power system
- Electric power, nuclear power
- Telecommunication
- UPS
- Marine

**Features of performance application**

- Designed service life of 22 years
- Supplement water period is 0.25-1 year (normal)  
1-2 year (choose water content recombination valve)
- High cycle service life
- Wide operation temperature range
- Excellent deep cycle performance
- Superior low current discharge performance
- Better safety performance and reliability
- Modular and installation design
- Performance/price ratio is high and yearly operating cost is low
- Environmental friendly

Rated voltage	2 V
Capacity@ 25°C(77°F)	350Ah @ 10hr to 1.80V per cell
Weight	Without electrolyte: about 21.5 kg (47.3 lb) With electrolyte: about 28.0 kg (61.6 lb)
electrolyte density (charged)	1.240±0.01g/cm³ (20°C) (68°F)
Reference internal resistance (charged)	About 0.51mΩ@ 25°C(77°F)
Short-circuit current	About 3804A (0.1S reference value)
Max discharge current	1050A (5sec)
Self-discharge	< 10% 90 days @ 25°C (77°F)
Temperature range	Application: -20°C ~ 50°C (-4°F ~ 122°F) Storage: 0°C ~ 20°C (32°F ~ 68°F) Recommendation: 20°C ~ 25°C (68°F ~ 77°F)
Max charge current	52.5A
Charge voltage @ 25°C(77°F)	Float charge: 2.23V, average charge: 2.35V Temperature compensation factor: -3 mV/°C
Terminal output	M10 copper terminal (HPb59-1)


**Execution standard:**

IEC60896-11 DIN40736  
BS EN 61427-2002  
GB/T13337.1  
Q/321284KCC 03-2006

**Authentication and certificate:**  
**Certificate of Qualification on Perfecting Measurement & Measuring System**  
 GB/T19022-2003  
 ISO10012:2003、IDT  
**Quality Management System Authentication**  
 GB/T19001-2000  
**Environmental Management System Authentication**  
 ISO 14001:2004  
**Occupational Health Management System Authentication**  
 NO.010607E2024R1M-2  
**CE authentication**  
 EN 61000-6-3:2001+A11:2004  
 EN 61000-6-1:2001  
**National Industrial Product Production License**  
 XK06-044-00012

**Structure features of Shuangdeng GFX series acid-proof stationary battery:**

- Plate: positive plate adopts tubular type plate which can effectively prevent active substance falling, positive plate frame is made of complex alloy, the alloy crystal particle is tiny and dense, the corrosion-resisting performance is good and service life is long. The negative plate adopts pasted plate, grid adopts radiated structure, which enhances utilization ratio of active substance and discharge capability of strong current; moreover, the charge reception capability is strong.
- Battery case: adopt AS transparent case with corrosion prevention, high strength and beautiful appearance, the internal structure and state of battery can be directly observed via transparent case.
- Separator: the combined separator of multi-hole corrugated plastic plate and micro-bore rubber separator have bigger electrolyte storage space, which enhances dispersion speed of electrolyte, greatly reduces internal resistance of battery and prevents dendrite short circuit after deep discharge.
- Terminal sealing: the built-in copper-core lead-based terminal post has strong current carrying capacity and corrosion resistance. The unique terminal post sealing structure can effectively eliminate the stress which is generated due to plate extension, leakage is avoided, sealing reliability of terminal post is ensured and service life of battery is greatly increased.
- Acid resistant bolt: adopt special funnel-shaped acid resistant bolt which can filter acid fume and prevent flame, the density and temperature of electrolyte can be measured directly, use is safe and maintenance is convenient.



Discharge current at different final voltages and different discharge rates unit: A (25°C, 77°F)

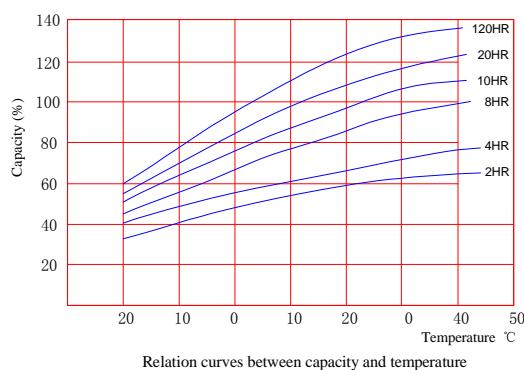
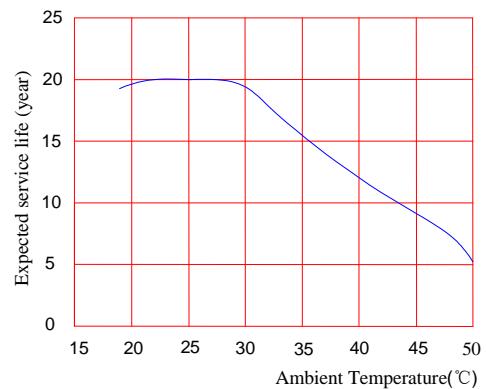
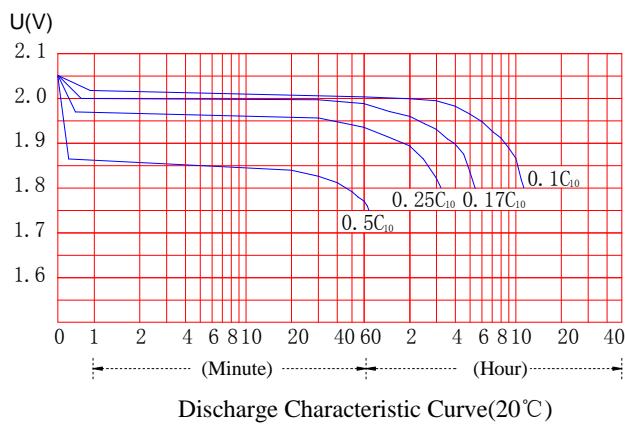
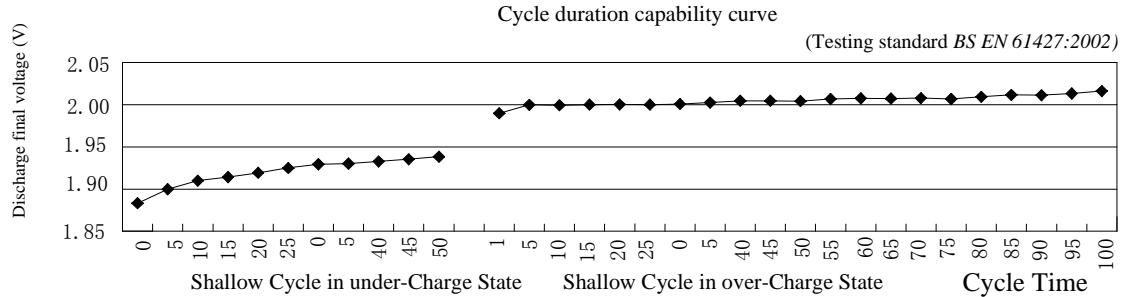
	5min	10min	15min	30min	45min	1hr	1.5hr	2hr	3hr	4hr	5hr	8 hr	10 hr	20hr	100 hr	120hr
1.90V	168	153	139	136	129	126	98	91	68	56	50	37	34	18.12	4.81	4.04
1.85V	185	184	191	179	148	143	113	103	75	61	55	40	35	19.93	5.06	4.25
1.80V	264	258	251	220	173	167	116	113	87	72	63	45	38	20.92	5.26	4.42
1.75V	317	310	299	246	197	183	130	122	91	74	65	46	39	21.75	5.42	4.55

Discharge power at different final voltages and different discharge rates unit: W (25°C, 77°F)

	5min	10min	15min	30min	45min	1hr	1.5hr	2hr	3hr	4hr	5hr	8 hr	10 hr	20hr	100 hr	120hr
1.90V	302	275	252	244	234	224	203	182	142	119	102	74	64	36.24	9.62	8.08
1.85V	333	330	313	303	277	251	227	202	158	131	112	80	69	39.46	10.02	8.42
1.80V	513	501	447	402	361	320	280	239	187	152	128	90	75	41.00	10.31	8.66
1.75V	615	601	514	450	405	360	309	257	196	158	132	96	77	41.98	10.46	8.78



GFX-350  
5 OPzS 350



Free service line: +86-4008-899-886

FAX: +86-25-83176850

Tel: +86-25-83176860

E-mail:[gjpt@chinashoto.com](mailto:gjpt@chinashoto.com)

E-mail:[joyce.zhong@chinashoto.com](mailto:joyce.zhong@chinashoto.com)

Web: <http://www.chinashoto.cn/>